


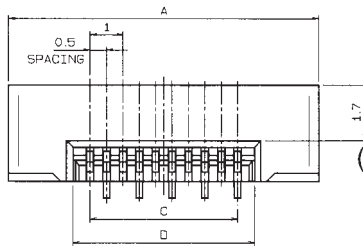







FFC/FPC Connectors 0.50mm Pitch Series 6214 - ZIF Straight SMT



STANDARD SLIDER



EXTENDED SLIDER
(Enhances Vacuum Pick-up)

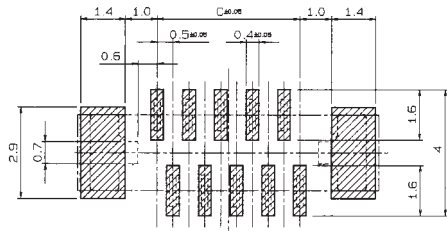

$A = 0.5N + 4.5$ $B = 0.5N + 3.9$ $C = 0.5(N-1)$ $D = 0.5N + 0.6$
--

ORDERING CODE

04 6214 0XX XXX 800
 NUMBER OF POSITIONS (06-30) VARIATION CODE
 000: WITH STANDARD SLIDER
 010: WITH EXTENDED SLIDER
 TAPE AND REEL

Specifications

- Number of Positions – 6-30
- 1000 Connectors per Tape & Reel
- Voltage – 50 V
- Current Rating – 0.4 amp max.
- Dielectric Withstanding Voltage – 200V rms/min.
- Operating Temperature – (-40°C - +85°C)
- Contact Material – phosphor bronze (tin-lead plated)
- Insulator Material – nylon 46, natural color (UL 94 V-O)
- Slider Material – PPS, natural color (UL 94 V-O)
- FFC/FPC Thickness – 0.3 ±0.05mm (0.012 ±0.002")
- Profile Height – 4.1mm (0.161")

Additional information on this product is available from AVX's catalog or AVX's FAX Service. Call 1-800-879-1613 and request document #297. Visit our website <http://www.avxcorp.com>